

# Triple Frequency Operated Microstrip Patch Antenna for Communication in Multibands

Laxmi Sharma, Garima Mathur

**Abstract**— In order to operate a microstrip antenna at various frequencies and to improve other parameters of microstrip antenna various designs configurations are performed. For this purpose IE3D software has been taken for experimental study. Planer designs are mostly preferred for these structures, due to their advantages of small size, low manufacturing cost and conformability. Microstrip patch antenna of 20X20 mm size is designed on a FR4 substrate of thickness 1.59mm and relative permittivity of 4.4. This layer consists of several grills of same dimensions. Triple Frequency operation is obtained with stable pattern characterization, such as gain and polarization within its bandwidth. Impedance matching is also observed for this case. Details of the measured and simulated results are presented and discussed in this paper.

**IndexTerms**— Bandwidth, Impedance, Grills, Microstrip Antenna, ,,

## I. INTRODUCTION

Rapid changes are taking place in mobile and wireless communication devices. These communication devices are becoming an imperative need of our daily lives. With time and requirements, these device are becoming smaller in size and hence antenna required for transmit and receive signals are becoming smaller and lightweight while maintaining high gain characteristics. Several efforts are reported in recent times to achieve compact antennas with improved performance. Parasitic elements may be applied to miniaturize geometrical structures.




Fig 1: Microstrip patch antenna

In this paper, a compact rectangular microstrip antenna is designed on glass epoxy FR-4 substrate and analyzed through IE3D simulation Software by considering free space conditions. Different radiation parameters are analyzed and results are presented systematically. The obtained simulated results suggest that proposed compact size antenna with

improved performance may be proved suitable for modern communication system. A single layer microstrip patch antenna is designed as shown in fig. This antenna is designed on a glass epoxy FR-4 substrate ( $\epsilon_r=4.4, \tan\delta=0.025$ , substrate thickness  $h=1.59$  mm). The simulation analysis of this antenna is carried out by applying IE3D simulation software. The antenna is fed through proximity feed. The patch has a dimension of 20x20mm.

This patch may be of any conducting material like gold or copper. Microstrip patch antenna radiate because of fringing field between patch edge and the ground plane. This antenna is mostly used in wireless application where low profile antennas are required. Because of several other advantages, this antenna has its various applications in the fields like mobile communication, space communication etc. A microstrip antenna is a resonant style radiator so one of its dimensions must be taken in consideration of surrounding environment.

## II. Antenna Design

### A. Rectangular Microstrip Antenna

A single layer rectangular patch antenna with dimension 20mmX20mm on a dielectric substrate is considered first. This antenna is designed on a glass epoxy FR-4 substrate ( $\epsilon_r=4.4, \tan\delta=0.025$ , substrate thickness  $h=1.59$  mm). Further simulation is carried out by using IE3D simulation software. The lower patch has dimensions  $L1=20$  mm and  $W1=20$ mm.



Fig 2: Microstrip Patch Antenna

**Manuscript received March 19, 2013.**

Laxmi Sharma, Department of ECE, RTU, Jaipur, India, 9530043600., (e-mail: laxmi.sh9@gamil.com).

Garima Mathur, His Department of ECE, RTU, Jaipur, India, 9829393517, (e-mail: garimamathurjec@gmail.com)

**B. Grilled Rectangular Patch Antenna**

To achieve improved performance, grill formation has been done on this layer as shown in figure3.

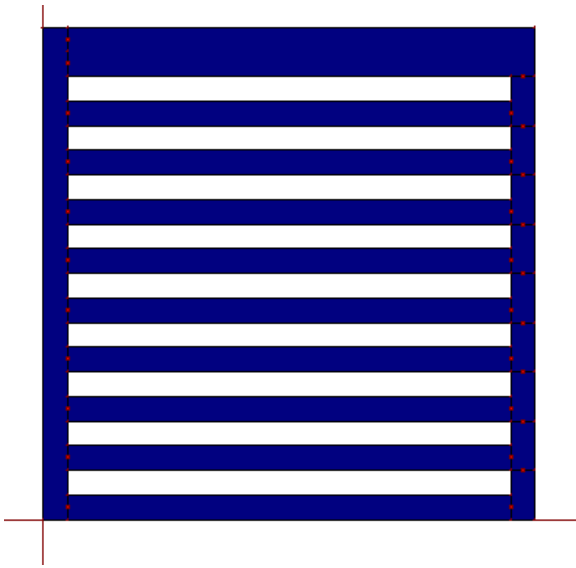


Fig 3: Grilled Microstrip antenna

Both the microstrip antenna are designed on a glass epoxy FR-4 substrate through air gap of thickness 1mm. The return loss of antenna is well below 10dB, which suggests bandwidth of approx 5 %.

**III. Results & Discussions**

The proposed antenna has been simulated using IE3D software .The physical parameters of all antenna are the same but the resonant frequency varies as the feed point changes.

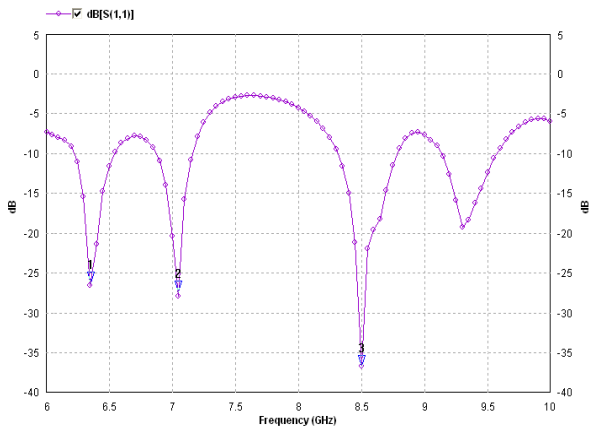


Fig 4: S-Parameter Measurement

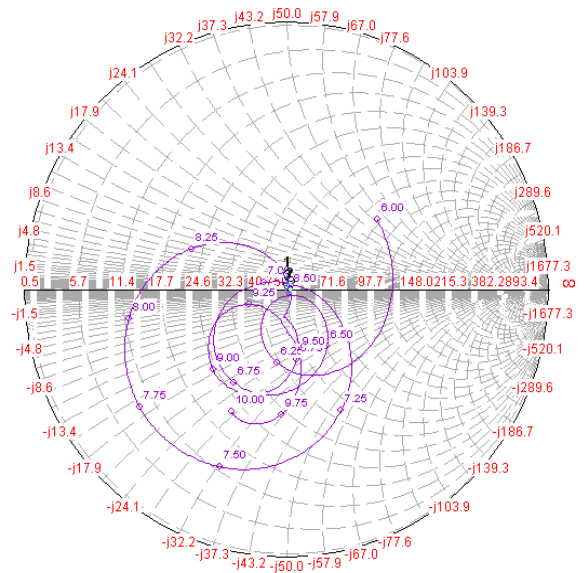


Fig 5: Impedance Matching Measurement

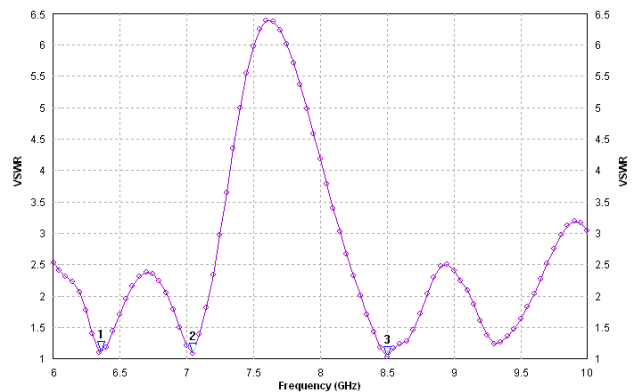


Fig 6:VSWR Measurement

**IV. CONCLUSION**

This paper presents the performance of microstrip patch antenna. The simulation results show the triple frequency operation of this structure. Results obtained shows that single patch gives bandwidth of 3%,3% and 5% at various operating frequencies .The direction of maximum radiation is normal to patch geometry and radiation patterns are symmetrical in nature.

**ACKNOWLEDGMENT**

Authours are thankful to Mr.Deepak Bhatnagar,Mr.Yogesh Bhomiya and Ms.Khushboo Gupta for their support in work with IE3D to prepare this paper.

**REFERENCES**

[1] Pozar,D M &Schaubert D H,Microstrip antennas:The analysis and design of microstrip antenna and arrays(IEEE Press ,Piscatay,NJ),1995  
 [2] Constantine A.Balanis :'Antenna Theory ,Analysis and Design'(John Wiley & Sons),  
 [3] Bhomia Y,Chaturvedi A,Yadav D,"V-slotted Triangular Microstrip Patch antenna",Int.Journal of Electronics Engineering,vol.2,no.1,pp.21-23,2012

- [4]C.L.Mak,K.M.Luk,K.F Lee,'Wideband Triangular Patch Antenna'IEE Proc. Microwave Antenna Propag1999.
- [5].IE3D by Zeland software Inc.
- [6]H.O.Peitgen,H.Jurgens and D.Saupe,Chaos and Fractals New York, Springer-Verlag, 1990.
- [7]Sumita Shekhawat,Bhatnagar.D.Stacked arrangement of Rectangular Microstrip Patches for Circularly Polarized Broadband Performanc,IEEE Antenna & wireless Propogation Letter.VOL.9,2010
- [8]K.L.Wong,Compact and Broadband Microstrip Antennas.New York:Willy,2002
- [9]R.Garg,P.Bhartia,I.Bahla,dA.Ittipiboon,Microstrip Antenna Design Handbook,2001.

**Laxmi Sharma** completed her B.E in the field of Electronics & Communication from Rajasthan University in 2009.Presently she is a research scholar in the field of Digital Communication.She has published papers in the field of communication and microstrip patch antenna.She has attended various conferences.She is member of ISTE. and workshops.

**Garima Mathur** completed her B.E. in the field of Electronics & Communication. She has completed her M.Tech in field of Communication from MNIT,Jaipur.Presently she is pursuing PHD from MNIT.She has more than 12 years academic/research experience .She has guided several projects for M.Tech.Her area of interest are MATLAB,Antennas,Wireless Communication,Digital Communication,VLSI etc.She has attendedvarious conferences and published various research papers in the field of communication.