

# Portable 2.4 GHz Operated Wireless Device for Remote Writing on Writing Board

Ajay S Sarode, Swapnil J Thakur, Vikas A Tajane

**Abstract**— This project will enable a person to write on white board from distance by using portable wireless device called Handheld device. The Hand Held device consists of a touchpad, microcontroller, wireless transmitter i.e.CC2500 and battery. The touch pad is interfaced with the microcontroller with the help of touch screen microcontroller. The co-ordinates are sent to the receiver side end by wireless transmitter. At the white board side wireless receiver will receive data through transceive model at receiver side i.e.CC2500. Microcontroller will act as interface between wireless receiver and PC.PC being connected to Projector(screen sharing), will project this writing on the white board. In addition to this, it also prevents harms caused by chalk dust to the teacher and students.

**Index Terms**— Touchscreen, Remote writing, Wireless, Electronic board, Graphical LCD, Projector.

## I. INTRODUCTION

In India, This traditional scheme has many disadvantages such as teacher has to approach the blackboard if he wants to explain his point with the help of a transmitter side and receiver side figure. Traditional teaching scheme still uses chalk-blackboard or slate pencil approach. If it is possible for him to write or draw on the board remotely i.e. without actually approaching the board, it will be convenient for him as well as students. Through this project we are trying to draw a pattern or figure what we write on touch pad on transmitter side with the help of touchscreen equipped portable device. The chalk, which is simply compressed dust, can bother some educators and students with allergies, not to mention land on top of other school equipment that is dust sensitive, such as computers and microscopes.

## II. EXISTING METHODS

The most well-known, cheapest approach for teaching is the use of chalk-blackboard slate pencil. The main disadvantage of this approach is harm caused by the chalk dust to the people around especially the children. It is possible with the help of single tap on the touchscreen. In addition to this, it takes efforts to wipe off the writing on the board with the help of duster while with the system that we have proposed, another

**Manuscript received April 13, 2015.**

**Ajay S. Sarode** Graduate Student, Dept. of E&Tc, Sir Visvesvaraya Institute Of Technology, Nasik, Maharashtra, India.

**Swapnil J. Thakur** Graduate Student, Dept. of E&Tc, Sir Visvesvaraya Institute Of Technology, Nasik, Maharashtra, India.

**Vikas A. Tajane** Graduate Student, Dept. of E&Tc, Sir Visvesvaraya Institute Of Technology, Nasik, Maharashtra, India.

**Prof. L. P. Bhamare** Lecturer, Dept. of E&Tc, Sir Visvesvaraya Institute Of Technology, Nasik, Maharashtra, India.

method is the use of whiteboard and marker which doesn't include chalk or slate pencil and hence there is no harm caused by chalk dust. The disadvantage that has been often highlighted in case of a whiteboard is that it often causes contrast problems for people who have vision impairment issues. People who are left handed also face some problems when they have to write on the whiteboard as most left handers tend to smudge the content that they have already written because of the way they hold the pen and write on it.

## III. PROPOSED MODEL AND WORKING

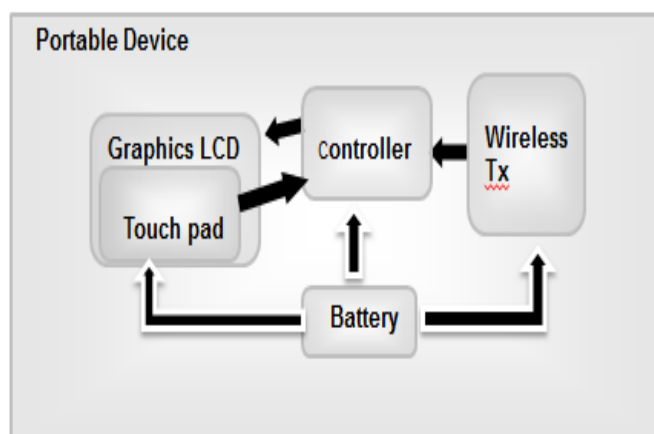


Fig1. Transmitter side

- 1) This device consists of a touchpad, 128 by 64 Graphical LCD, 8 or 32 bit microcontroller, wireless transmitter and battery.
- 2) Touchpad is kept on the top of GLCD.
- 3) Whatever drawing is made on touch pad, similar pattern is generated on GLCD.
- 4) Touch pad is interfaced with microcontroller with the help of touch screen controller. The co-ordinates are sent to white board end by cc2500 wireless transmitter.

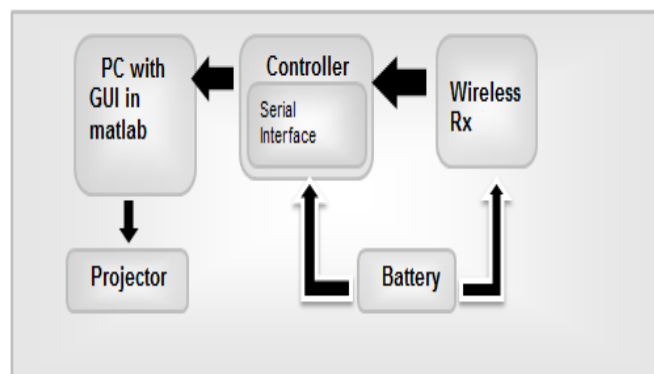


Fig.2 Receiver side

The handheld device consists of touchscreen, microcontroller and CC2500 RF transceiver module. The touchscreen used here is 4 wire resistive touchscreen. As we slide the finger or stylus over the touchscreen, specific

voltage is generated across the 2 wires of touchscreen. This voltage is converted into digital form with the help of in built 10-bit ADC in ATMEGA8 microcontroller. Different voltages are associated with different points on the touchscreen as illustrated in figure shown below-

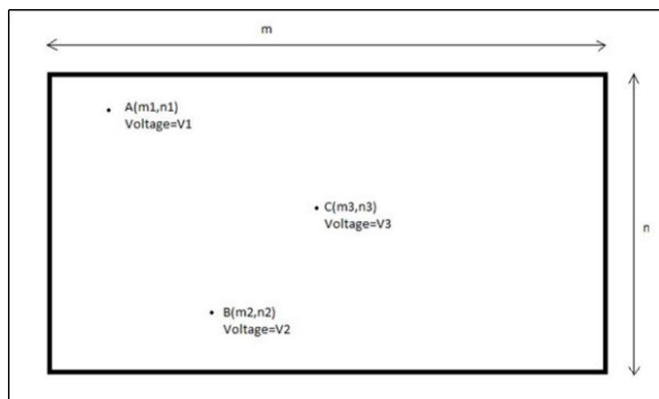


Fig.3 Touchscreen coordinates and voltages

Now this data in digital form is transmitted with the help of CC2500 module which is interfaced with ATMEGA8. CC2500 at the PC side will receive this data and send it to the Visual Basic programme which is installed on the PC. In the Visual Basic software, the same pattern as drawn on the touchscreen of the handheld device will be drawn and projector will project this writing on the board.

#### IV. HARDWARE IMPLEMENTATION

- 1) Touchscreen- It is used to determine the point of contact as we slide the stylus or finger over the screen.
- 2) Microcontroller-It is used to control and monitor various activities taking place while the project is working. In this project we are using ATMEGA8 microcontroller.
- 3) Wireless transceiver –We are using CC2500 RF module (2.4GHz ISM band) for wireless transmission and reception of data between the handheld device and the PC.

#### V. FUTURE SCOPE

1. The project can be made more efficient by using a capacitive touch pad.
2. In this project we can add the feature of letter recognition.
3. By using GSM technique the project can be more expanded.
4. It can provide memory elements for showing the different file formats.

#### VI. CONCLUSION

Thus in this paper we successfully implemented the system which will allow the person to write on the touch pad which is present on the handheld device from a distance (30 meters). We also overcame the shortcomings of traditional chalk-blackboard or slate pencil approach of teaching by replacing it with an easy-to-use portable touchscreen device. This system can be effectively implemented in schools and colleges as well.

#### ACKNOWLEDGMENT

We thank our HOD sir and teachers for their continuous support and encouraging us in this work, for cultivating new and aspiring ideas in our mind. We would especially thank our project guide Mr. Liladhar P. Bhamare for giving us a vital information about our project and guiding through the process and being available for any problem faced.

#### REFERENCES

- [1] Chirag V. Kolhe<sup>1</sup>, Samir H. Kamthe<sup>2</sup>, Suraj R. Mahamuni<sup>3</sup>, Sonali Y. Sawant<sup>4</sup> IJAREEIE ISSN (Print) : 2320 – 3765 ISSN (Online): 2278 – 8875 Vol. 3, Issue 4, April 2014.
- [2] ©2012 Stephen Wu and Justin Churchill Template ©2005 Cornell University.
- [3] Rajmane Sainath Bhagwanrao<sup>1</sup>, Bahir Rahul Shivaji<sup>2</sup>, Jeughale Shivam Sadashiv<sup>3</sup>, Prof. Aher Vishal A4 (ISSN 2250-2459, ISO 9001:2008 Certified Journal, Volume 4, Issue 3, March 2014)
- [4] Pawan Kumar, Vikas Bhrdwaj, Kiran Pal, Narayan Singh Rathor, Amit Mishra International Journal of Soft Computing and Engineering (IJSCE) ISSN: 2231-2307, Volume-2, Issue-3, July 2012

**Ajay S. Sarode** Graduate Student, Dept. of E&Tc, Sir Visvesvaraya Institute Of Technology, Nasik, Maharashtra, India.

**Swapnil J. Thakur** Graduate Student, Dept. of E&Tc, Sir Visvesvaraya Institute Of Technology, Nasik, Maharashtra, India.

**Vikas A. Tajane** Graduate Student, Dept. of E&Tc, Sir Visvesvaraya Institute Of Technology, Nasik, Maharashtra, India.

**Prof. L. P. Bhamare** Lecturer, Dept. of E&Tc, Sir Visvesvaraya Institute Of Technology, Nasik, Maharashtra, India.