

Solar Air Preheater Performance Evaluation Using New Design

P.S. Chopade, S.V. Channapatanna

Abstract— This paper presents the performance of a solar air heater with old and improved model. Based on existing model readings were taken at fixed orientation and same is used at different orientations based on sun's position and readings were taken as improved model. In the improved model of the heater the solar plates are oriented as per sun rays direction and based on readings are taken, this change in orientation results into performance improvement. The results obtained during the test period revealed that the temperatures inside the solar collector were much higher than the ambient temperature during most hours of the day-light. The maximum temperature rise inside the solar cabinet was up to 25°C. The capital cost involved in the construction of a solar dryer is much lower to that of a mechanical dryer. Also from the test carried out, the simple and inexpensive solar dryer was designed and constructed using locally sourced materials. The average improvement in overall efficiency is 23 % than conventional solar heater i.e. with fixed orientation.

Index Terms—Air preheater, simple and inexpensive model, Heat transfer enhancement

I. INTRODUCTION

Solar air heating is a solar thermal technology in which the energy from the sun, insolation, is captured by an absorbing medium and used to heat air. Solar air heating is a renewable energy heating technology used to heat or condition air for buildings or process heat applications. It is typically the most cost-effective out of all the solar technologies, especially in commercial and industrial applications, and it addresses the largest usage of building energy in heating climates, which is space heating and industrial process heating.

A. Solar air collectors can be divided into two categories:

- Unglazed Air Collectors or Transpired Solar Collector (used primarily to heat ambient air in commercial, industrial, agriculture and process applications)

- Glazed Solar Collectors (recirculating types that are usually used for space heating).

P.S. Chopade-ME- Student, DYPSOEA, Ambi- Pune, Mh – State, India

S.V. Channapatanna-Professor, DYPSOEA, Ambi- Pune, Mh – State, India

a. Collector types

Solar collectors for air heat may be classified by their air distribution paths or by their materials, such as glazed or unglazed. For example:

- Through-pass collectors
- Front-pass
- Back pass
- Combination front and back pass collectors
- Unglazed
- Glazed

Unglazed air collectors and transpired solar collectors:

Background: The term "unglazed air collector" refers to a solar air heating system that consists of an absorber without any glass or glazing over top. The most common type of unglazed collector on the market is the transpired solar collector. This technology was invented and patented as Solar Wall by Conserval Engineering Inc. in the 1990s, who worked with the U.S. Department of Energy (NREL) and Natural Resources Canada on the commercialization of the technology around the world. The technology has been extensively monitored by these government agencies, and Natural Resources Canada developed the feasibility tool RETScreen to model the energy savings from transpired solar collectors. Since that time, several thousand transpired solar collector systems have been installed in a variety of commercial, industrial, institutional, agricultural, and process applications in over 35 countries around the world. The technology was originally used primarily in industrial applications such as manufacturing and assembly plants where there were high ventilation requirements, stratified ceiling heat, and often negative pressure in the building. The first unglazed transpired collector in the world was installed by Ford Motor Company on their assembly plant in Oakville, Canada.

The Solar Wall transpired collector technology and inventor John Hollick were honoured in 2014 by the American Society of Mechanical Engineers (ASME). They featured the 80 best inventions, inventors and engineering feats of the past two centuries, including Edison, Ford, Westinghouse, Carrier, the steam engine and the Panama Canal in an exhibit entitled "Engineering the Everyday and the Extraordinary". ASME focused on nine categories of engineering: Environment, Food, Safety, Manufacturing, Energy & Power, Transportation, Health, Exploration and Communication. The Solar Wall technology and John Hollick were featured in the Energy & Power category.

With the increasing drive to install renewable energy systems on buildings, transpired solar collectors are now used across the entire building stock because of high energy production (up to 500-600 peak thermal Watts/square metre), high solar

conversion (up to 90%) and lower capital costs when compared against solar photovoltaic and solar water heating.

b) Method of operation

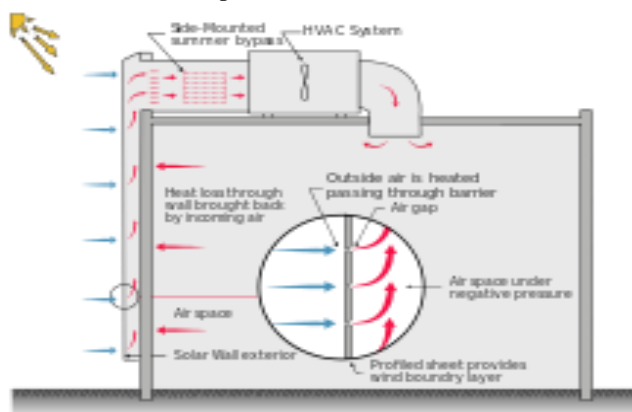


Fig 1: Schematic showing how the Solar Wall air heating system works

Unglazed air collectors heat ambient (outside) air instead of recirculated building air. Transpired solar collectors are usually wall-mounted to capture the lower sun angle in the winter heating months as well as sun reflection off the snow and achieve their optimum performance and return on investment when operating at flow rates of between 4 and 8 CFM per square foot (72 to 144 m³/h.m²) of collector area.

The exterior surface of a transpired solar collector consists of thousands of tiny micro-perforations that allow the boundary layer of heat to be captured and uniformly drawn into an air cavity behind the exterior panels. This solar heated ventilation air is drawn into the building's ventilation system from air outlets positioned along the top of the collector and the air is then distributed in the building via conventional means or using a solar ducting system.

The extensive monitoring by Natural Resources Canada and NREL has shown that transpired solar collector systems reduce between 10-50% of the conventional heating load and that RETScreen is an accurate predictor of system performance.

Transpired solar collectors act as a rain screen and they also capture heat loss escaping from the building envelope which is collected in the collector air cavity and drawn back into the ventilation system. There is no maintenance required with solar air heating systems and the expected lifespan is over 30 years.

c) Variations of transpired solar collectors

Unglazed transpired collectors can also be roof-mounted for applications in which there is not a suitable south facing wall or for other architectural considerations. A number of companies offer transpired air collectors suitable for roof mounting either mounted directly onto a sloped metal roof or as modules affixed to ducts and connected to nearby fans and HVAC units.

Higher temperatures are also possible with transpired collectors which can be configured to heat the air twice to increase the temperature rise making it suitable for space heating of larger buildings. In a 2-stage system, the first stage is the typical unglazed transpired collector and the second stage has glazing covering the transpired collector. The glazing allows all of that heated air from the first stage to be

directed through a second set of transpired collectors for a second stage of solar heating.

Another innovation is to recover heat from the PV modules (which is often four times more than the electrical energy produced by the PV module) by mounting the PV modules onto the solar air system. In cases where there is a heating requirement, incorporating a solar air component into the PV system provides two technical advantages; it removes the PV heat and allows the PV system to operate closer to its rated efficiency (which is 25 C); and it decreases the total energy payback period associated with the combined system because the heat energy is captured and used to offset conventional heating.

d) Glazed air systems

Functioning in a similar manner as a conventional forced air furnace, systems provide heat by recirculating conditioned building air through solar collectors. Through the use of an energy collecting surface to absorb the sun's thermal energy, and ducting air to come in contact with it, a simple and effective collector can be made for a variety of air conditioning and process applications.



Fig 2: SPF Solar Air Heat Collector

A simple solar air collector consists of an absorber material, sometimes having a selective surface, to capture radiation from the sun and transfers this thermal energy to air via conduction heat transfer. This heated air is then ducted to the building space or to the process area where the heated air is used for space heating or process heating needs.

The pioneering figure for this type of system was George Lof, who built solar heated air system for a house in Boulder, Colorado, in 1945. He later included a gravel bed for heat storage.

e) Through-pass air collector

In the through-pass configuration, air ducted onto one side of the absorber passes through a perforated or fibrous type material and is heated from the conductive properties of the material and the convective properties of the moving air. Through-pass absorbers have the most surface area which enables relatively high conductive heat transfer rates, but significant pressure drop can require greater fan power, and deterioration of certain absorber material after many years of solar radiation exposure can additionally create problems with air quality and performance.

f) Back, front, and combination passage air collector

In back-pass, front-pass, and combination type configurations the air is directed on either the back, the front, or on both sides of the absorber to be heated from the return to the supply

ducting headers. Although passing the air on both sides of the absorber will provide a greater surface area for conductive heat transfer, issues with dust (fouling) can arise from passing air on the front side of the absorber which reduces absorber efficiency by limiting the amount of sunlight received. In cold climates, air passing next to the glazing will additionally cause greater heat loss, resulting in lower overall performance of the collector.

g) *Solar air heat applications*

A variety of applications can utilize solar air heat technologies to reduce the carbon footprint from use of conventional heat sources, such as fossil fuels, to create a sustainable means to produce thermal energy. Applications such as space heating, greenhouse season extension, pre-heating ventilation makeup air, or process heat can be addressed by solar air heat devices.^[14] In the field of 'solar co-generation' solar thermal technologies are paired with photovoltaics (PV) to increase the efficiency of the system by cooling the PV panels to improve their electrical performance while simultaneously warming air for space heating.

h) *Space heating applications*

Space heating for residential and commercial applications can be done through the use of solar air heating panels. This configuration operates by drawing air from the building envelope or from the outdoor environment and passing it through the collector where the air warms via conduction from the absorber and is then supplied to the living or working space by either passive means or with the assistance of a fan.

i) *Process heat applications*

Solar air heat can also be used in process applications such as drying laundry, crops (i.e. tea, corn, coffee) and other drying applications. Air heated through a solar collector and then passed over a medium to be dried can provide an efficient means by which to reduce the moisture content of the material.

j) *Night cooling applications*

Radiation cooling to the night sky is based on the principle of heat loss by long-wave radiation from a warm surface (roof) to another body at a lower temperature (sky). On a clear night, a typical sky-facing surface can cool at a rate of about 75 W/m² (25 BTU/hr/ft²). This means that a metal roof facing the sky will be colder than the surrounding air temperature. Collectors can take advantage of these cooling phenomena. As warm night air touches the cooler surface of a transpired collector, heat is transferred to the metal, radiated to the sky and the cooled air is then drawn in through the perforated surface. Cool air may then be drawn into HVAC units.

k) *Ventilation applications*

By drawing air through a properly designed air collector or air heater, solar heated fresh air can reduce the heating load during sunny operation. Applications include transpired collectors preheating fresh air entering a heat recovery ventilator, or suction created by venting heated air out of some other solar chimney.

II. PROBLEM DEFINITION

The solar energy is to be used to maximum extent so there is requirement of system that solar energy should be utilize at maximum extent. Air preheating is one of the widely used

applications of Solar energy usage and is to be studied for Solar energy utilization improvement. Hence detail study of solar air preheater and its arrangement with improved performance is to be undertaken.

A) Objectives:

The objective of this study is to develop a solar air heater in which the problems of low and medium scale heated air generation could be alleviated, if the solar heater is designed and constructed with the consideration of overcoming the limitations of existing heaters.

So therefore, this work will be based on the importance of a improved design solar heater which is reliable and economically, design and construct solar heater using locally available materials and to evaluate the performance of this solar heater.

- To develop air preheating system for testing.
- Improve efficiency of the Solar air preheating system

III. SYSTEM MODEL

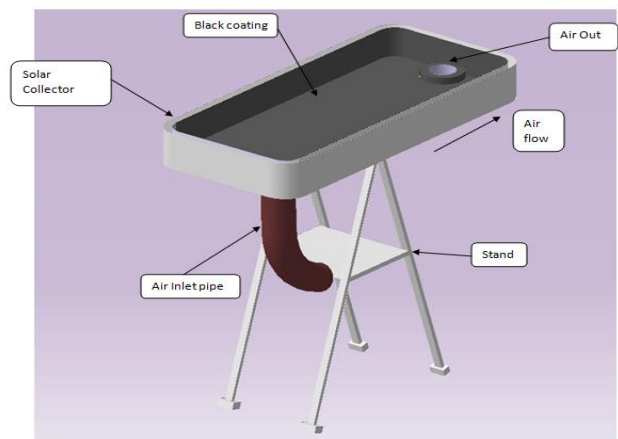


Fig 3: Prototype for existing system

A) Modified System Model



Fig 4: Improved model

B) Calculation formulas for System Efficiency:

A = Surface area of solar collector, m²

C_p = Specific heat of air at constant pressure in KJ/kg⁰K

ΔT = Temperature Difference between inlet at outlet

q = Heat Transfer Rate in KJ

Solar Air Preheater Performance Evaluation Using New Design

m = Flow rate of Air, Kg/S

I_o = Solar Intensity, W/m^2

$\Delta T = T_{out} - T_{in}$

$q = m * C_p * \Delta T$

Efficiency $\eta = \frac{q}{I_o * A}$

By following above calculation method, the efficiency of the solar air preheater was calculated.


IV. RESULTS

Table: Existing and improved model readings for T_{out} and efficiency

Time	T_{out} , °C			Efficiency, %		
	Exist-ing model	Improv-ed model	Ave-ra ge Improvement	Exist-i ng model	Improv-ed model	Avg Impr-ove-ment
10:00 AM	33	38	14.50 %	25.26	31.44	23.1 0%
12:30 PM	45.5	51.5		39.9	48.98	
2:30 PM	51.2	57		44.1	53.13	
4:30 PM	39.7	48		32.98	41.23	

- The above results shows that T_{out} is improved with improvement in model by around 14.5 %.
- Also the overall efficiency of the system is increased around 23 % with improved model.
- Hence, we can conclude that the model we worked on is efficient than conventional solar collector which is fix mounted on the same orientation.
- One problem with improved model is that we have to rotate the frame as per Solar rays orientation manually or have to arrange separate mechanism for automatic rotation of the solar collector based on time of the day.
- This can be used at several applications like solar dryer for foods / agriculture goods, air preheater etc.

- [2] Chii-Dong Ho “Analytical and experimental studies of wire mesh packed double-pass solar air heaters under recycling operation” at “The 7th International Conference on Applied Energy – ICAE 2015 ”
- [3] Ting-ting Zhu “Experimental investigation on the performance of a novel solar air heater based on flat micro-heat pipe arrays (FMHPA)” at “International Conference on Solar Heating and Cooling for Buildings and Industry, SHC 2014”
- [4] Hamdi Kessentini “Numerical and experimental study of an integrated solar collector with CPC reflectors” at “Elsevier Renewable Energy 57 (2013) 577-586”
- [5] P. Mohamed Shameer, “Designing and Fabrication of Double Pass Solar Air Heater Integrated with Thermal Storage” at “International Journal of Science and Research (IJSR) ISSN (Online): 2319-7064 2013”.
- [6] Yuechao Deng, “Experimental study of the thermal performance for the novel flat plate solar water heater with micro heat pipe array absorber” at “International Conference on Solar Heating and Cooling for Buildings and Industry, SHC 2014”.
- [7] Federico Bava, “Simulation of a solar collector array consisting of two types of solar collectors, with and without convection barrier” at “International Conference on Solar Heating and Cooling for Buildings and Industry, SHC 2014.”
- [8] Hiroshi Tanaka, “Theoretical analysis of solar thermal collector and flat plate bottom reflector with a gap between them.” at “Elsevier Energy Reports 1 (2015) 80–88.”
- [9] Amir Hematian, “Experimental analysis of flat plate solar air collector efficiency” at “Indian Journal of Science and Technology Vol. 5 No.8 (August 2012) ISSN: 0974- 6846.”
- [10] Prashant Kumar “Effect of Differential Mass Flow Rate on the Thermal Performance of Double Duct Packed Bed Solar Air Heaters” at “International Conference on Renewable Energies and Power Quality (ICREPQ’12) Santiago de Compostela (Spain), 28th to 30th March, 2012”.
- [11] Foued Chabane “Thermal Efficiency Analysis of A Single-Flow Solar Air Heater With Different Mass Flow Rates in a Smooth Plate” at “Frontiers in Heat and Mass Transfer (FHMT), 4, 013006 (2013) DOI: 10.5098/hmt.v4.1.3006”.
- [12] P. T. Saravanakumar, “Numerical Study and Thermal Performance of the Flat Plate Solar Air Heaters with and Without Thermal Storage” at “ARPN Journal of Engineering and Applied Sciences VOL. 7, NO. 4, APRIL 2012 ISSN 1819-6608”
- [13] Santosh Vyas “Thermal Performance Testing of a Flat Plate Solar Air Heater Using Optical Measurement Technique” at “International Journal of Recent advances in Mechanical Engineering (IJMECH) Vol.3, No.4, November 2014 DOI : 10.14810/ijmech.2014.3407 69”.

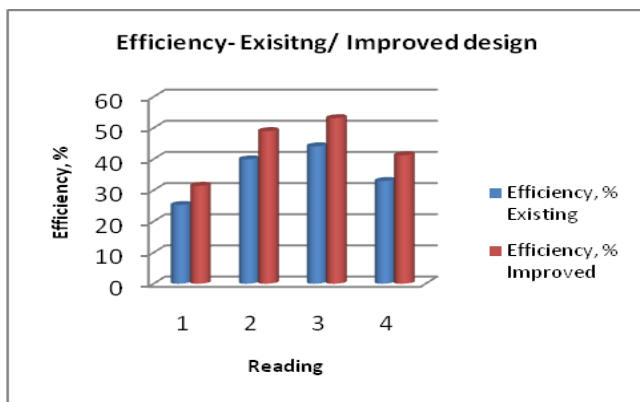

Graph 1: Comparison-Efficiency Of Existing And Improved Design

REFERENCES

- [1] Abhishek Saxena “Design and thermal performance evaluation of a novel solar air heater” at “Elsevier Renewable Energy 77 (2015) 501-511”