

# Automatic of Component Production and minimization Economics of Production costs

Darina Matisková

**Abstract**— When cutting conditions and tool durability optimizing, it is necessary to apply certain optimizing criterion within certain restraining conditions. The restrictions are given by technical parameters of a machine, tool, machined material, required quality of machined surface etc. The essential economic criterion is the amount of production cost. The notion of „machinability of materials“ is a complex of characteristics of the machined material which is monitored in the view of its fitness for the production in a certain way of machining.

**Index Terms**— Production cost, economic reasons, optimizing, machine serviceability

## I. INTRODUCTION


The machinability of materials is considered to be a parameter which characterizes the machined material in the process of cutting and expresses the degree of machining effectivity in terms of material of a product. Cutting speed when considering certain cutting edge durability, surface roughness, degree of splinter deformation and resultant splinter shape and its proportions are utilised as evaluation of machinability indexes. Confrontation with the reference material enables to determine the rated machinability as one of the basic characteristics of machined material used when cutting conditions are optimized.

## II. ECONOMIC REASONS FOR AUTOMATION OF COMPONENT PRODUCTION

When considering machining process from the point of efficiency (productivity) production costs are oblivious. Yet, It is applicable exceptionally.

In market mechanism it is required to produce a product in such economic conditions so that its sale price be acceptable and attractive. To start thinking about a production process it is necessary to get an idea about its cost structure.

Using more expensive production installation the costs raise more rapidly. They reach minimum at higher cutting speed than when utilizing usual machines. Disobedience to this relation leads to sharp rise of production costs when machining using the CNC machines. The basic cost development scheme is in the fig. 1.

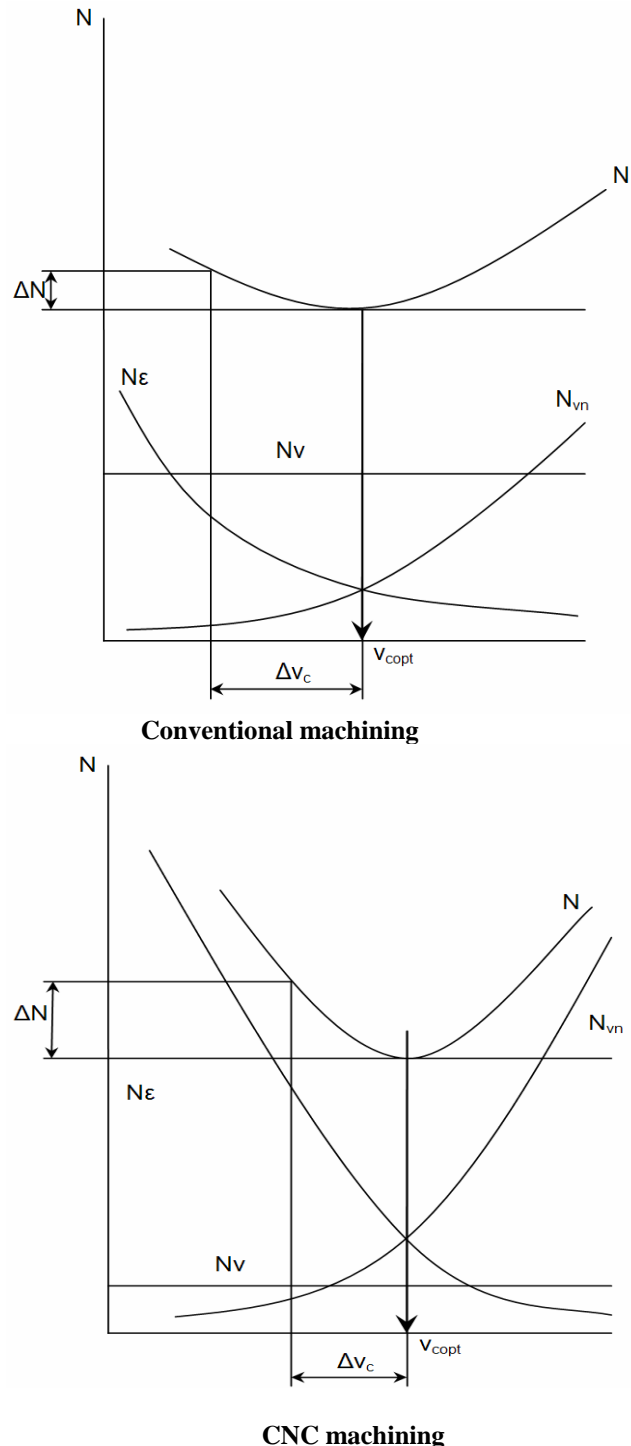

**Fig. 1.** Dependence of  $N$  production costs and their components on cutting speed  $v_c$ .  $N_c$  – costs on machine work,  $N_v$  – secondary work costs,  $N_{vn}$  – costs to device exchange.

III. MATHEMATICAL EXPRESSION ECONOMIC EFFECT

In present, the cutting conditions are mainly chosen from norms that is not optimal. The nature of cutting conditions optimization is to determine optimal values of given conditions (cutting depth –  $a_p$ , underthrust depth –  $f$ , cutting speed –  $v_c$ ) and the optimization of a machine durability.

For a machine with replaceable cutting plates that are re-sharpened is valid:

$$N_{nT} = \frac{C_p \cdot z_p \cdot z_0}{z_n \cdot s_p (z_0 + 1)} + (1 + k_m) \cdot \frac{C_m}{z_u} + \tau_{as} \cdot k_c \cdot \frac{M_{as}}{60} \left(1 + \frac{RNO_{pl}}{100}\right) \cdot \frac{z_0}{z_0 + 1} \quad (1)$$

Where:

$z_0$  is the number of possible re-sharpening of a plate.

Costs to exchange of a device can be given by:

$$N_{vm} = \tau_{vm} \left[ k_c \frac{M_n}{60} \left(1 + \frac{RNS_{pl}}{100}\right) + \frac{O_s}{60} \right] = \tau_{vm} N_{vmm} z_v \quad (2)$$

Where:

$N_{vmm}$  are costs to exchange of a device per, [min],

$M_n$  – wages of a setup man including social and health insurance, [€<sup>-1</sup>],

$\tau_{vm}$  – time to exchange a device, [min],

The criterion for minimal production costs can be given (production costs to operational department shall be minimum) by the relation :

$$N_c = N_s + N_n + N_m \quad (3)$$

where:

$N$  – production costs to calculate an operational section, [€],

$N_s$  - costs to machine labor per an operational section, [€],

$N_n$  – costs to machines related to the operational section, [€],

$N_m$  – costs to exchange or offset of a worn-out device related to the operational section, [€].

Having substituted the above-mentioned relations into this criterion the optimization

$$N = \tau_{As} N_{sm} + \frac{\tau_{As}}{T} k_r N_{nT} + \tau_{vm} N_{vmm} \frac{\tau_{As}}{T} k_r \rightarrow \min \quad (4)$$

Or :

$$N = \tau_{As} N_{sm} + \frac{\tau_{As}}{T} k_r (N_{nT} + \tau_{vm} N_{vmm}) \rightarrow \min \quad (5)$$

The machine time can be given by:

$$\tau_{As} = \frac{L_{ch}}{n \cdot f} \quad (6)$$

Where:

$L_{ch}$  is the length of machine automatic operation run, [mm],

$n$ - rotational frequency,

$f$ – displacement, [mm]

Substitution (4) in (5) results in the criterion equation:

$$N = \frac{L_{ch}}{n \cdot f} N_{ns} + \frac{L_{ch} k_r}{n \cdot f \cdot T} (N_{nT} + \tau_{vm} N_{vmm}) \rightarrow \min \quad (7)$$

Having modified:

$$\frac{K_1}{n \cdot f} + \frac{K_2}{n \cdot f \cdot T} \rightarrow \min \quad (8)$$

Where:

$$K_1 = L_{ch} \cdot N_{sm} \quad (9)$$

$$K_2 = L_{ch} k_r (N_{nT} + \tau_{vm} N_{vmm}) \quad (10)$$

When milling operation, proportional parameter of displacement per rotation  $f$  and displacement per tooth  $fz$  are considered. Total production costs per a work-piece can be given by the relation:

$$N_c = \sum_1^{nu} N_i + N_v + \frac{N_d}{n} + \frac{N_{sz}}{n} \quad (11)$$

Where:

$N_c$  are total production costs per a work-piece, [€],

$N_i$  – production costs to  $i$ - operational section, [€],

$N_{sz}$  - costs to a special device necessary for production of a given work-piece, [€],

$n$  – number of produced pieces,

$n_u$  – number of operational sections within one work-piece,

Costs to secondary work:

$$N_v = \tau_{Av} \left[ k_c \frac{M_0}{60} \left(1 + \frac{RNS_{pl}}{100}\right) + \frac{O_s}{60} \right] = \tau_{As} N_{vm} \quad (12)$$

Where:

$N_{vm}$  – costs to secondary work, [€],

$\tau_{Av}$  – unit secondary time, [min.],

Rate costs:

$$N_B = \left[ k_c \frac{M_s}{60} \left(1 + \frac{RNS_{pl}}{100}\right) + \frac{O_s}{60} \right] = \tau_{BC} N_{Bm} \quad (13)$$

Where:

$N_{Bm}$  are rate costs, [€<sup>-1</sup>],

$\tau_{BC}$  – rate time with shift time over plus, [min]

Criterion of minimum production costs can be also given by the method of hourly operational costs.

Fixed costs whose share in total costs continually raises are just those unwelcome costs that burden production. This is one reason why it is success to produce with optimal capacity employment.

For practical utilization it is appropriate to express the capacity utilization in time units (hours, norm hours). When formulating the cost model of a production workplace (of a machine) other advantageous properties of this method can be used.

1. Possibility of division (decomposition) hourly overhead lump sum into two individual units as follows:

- Into hourly overhead lump sum of joint expenses ( $HRP_{sp}$ )

- Into hourly overhead lump sum of a production workplace (a machine) ( $HRP_{pra}$ )

2. Possibility to decompose each hourly overhead lump sum as the sole number into more partial generic cost items that

enables to separately observe individual impacts on hourly overhead lump sum.

The first property enables to present overhead costs to particular activities within the production process with the help of hourly overhead lump sum as the total of two separable components. Total value of hourly overhead lump sum is consequently given by the total of both components.

While  $HRP_{sp}$  will be the same for all workplaces within a single organizational unit (center, operational department, etc.) to which joint expenses are related, the  $HRP_{pra}$  value

will be unique for each workplace (machine, set of machines). The second property allows the distinction of general expenses from the point of generic e.g. for example to components of write-offs, rent (leasing), wages, energy costs, overhead material etc. It is crucial to choose such a classification in concrete application that would respond to the situation given. It is necessary to focus on main items sensible that the less important ones can possibly be joint together. It means for example that while the significant part of a production device will not be true but rented (leased) than that item has to appear in the  $HRP$  decomposition. While the production device is true it is useless to mention the item.

The simple solution is not to divide general expenses into two parts i.e. joint expenses of a department and costs of a workplace but leave it as the average value of hourly overhead lump sum designed on the basis of share of total of all overhead costs within a department and total department capacity. It is a simple solution that can be appropriate as the first stage of transition from a calculation through an extra charge to a calculation with the usage of the hourly overhead lump sum method.

By this simplification the influence of individual factors is covered and their impact is not clear in the total calculation. Essential matters for the working process optimization are a solid analysis of on what the value of expense units depends. It is determining just because the information enables to manage the working process effectively.

From the point of preceding ideas, there is an alternative coming out to determine minute costs to machine work :

$$N_{sm} = k_c \frac{M_0}{60} + \frac{HRP_{sp}}{60} + \frac{HRP_{pra}}{60} \quad (14)$$

Where:

$HRP_{sp}$  hourly absorbed lump sum of joint expenses, [ $\text{€h}^{-1}$ ],

$HRP_{pra}$  – hourly overhead lump sum of a production department (a machine), [ $\text{€h}^{-1}$ ]

By analogy for minute expenses to exchange of a machine (relation 2):

$$N_{vmm} = k_c \frac{M_s}{60} + \frac{HRP_{sp}}{60} + \frac{HRP_{pra}}{60} \quad (15)$$

The mentioned way of how to express cost items presents the model that comes out of the dynamic calculation principle and uses the method of hourly annual lump sums. It requires a solid analysis mainly of overhead expenses in the relation to a calculation unit. It is a model applicably open e.i. it accepts the costs units that are defined and able to find out in the

application given. It relates the lowest organizational levels, it means workplaces (a machine) and a department. It concerns the open model also from the point of the possibility to enhance it by more-detailed specification of dependence of costs on cutting conditions.

Index of machine time-utilization (share of time when a machine works in given number of shifts to total time of scheduled shifts) is defined by long-term average eventually by the assumption of machine utilization. For various types of productions approximated values of the index are found in table 1.

**Table 1.** Approximated values of machine time-utilization index

Type production	$k_{vs}$
Mass and large-lot production	0,8
Stored programme machines, machining center	0,65 -0,75
Conventional small-lot production	0,5 – 0,65

Costs to devices (write-off, maintenance, potential sharpening) can be expressed as follows:

$$N_n = z_v N_{nT} \quad (16)$$

Where:

$N_{nT}$  are machine operational costs related to one device serviceability, [€],

$z_v$  – number of the machine exchange related to one operational section (it usually is a number lower than 1).

## CONCLUSIONS AND ACKNOWLEDGMENT

When optimizing cutting conditions, under certain conditions it is possible to determine optimal serviceability of a machine according to a certain optimizing criterion independently on cutting condition optimization. When coming out from optimal serviceability intended from the point of minimum production costs at cutting conditions optimizing, the criterion of maximum reduction is identical with the criterion of minimum production costs.

## REFERENCES

- [1] BERGELIS, A. : Impact of collaborative manufacturing engineering on production variety and efficiency. *10<sup>th</sup> International Conference: New Ways in Manufacturing Technologies 2010*, Prešov, pp. 95-102, ISBN 978-80-553-0441-0
- [2] HIRANO, H. : *5 Pillars of the visual workplace*. Productivity Press, Portland, Oregon, 1998.
- [3] HOSHI, T. : High productivity machining research in Japan. *Journal of Applied Metal Working* 4 (3), 1986, pp. 226-237
- [4] LUXHOJ, J. T., RISS, J. O., THORSTEINSSON, U. : Trends and perspectives in industrial Maintenance Management. *Journal of Manufacturing Systems* vol. 16, 6/1997
- [5] MÁDL, J. : Computer – Aided determination of machining conditions. Science Report CEEPUS, Kielce 2010, pp.97-103. ISBN 978-83-88906-56-5
- [6] MÁDL, J., KVASNIČKA, J. : *Optimalizace obráběcího procesu*. Praha, ČVUT, 1998, 168
- [7] VASILKO, K., BOKUČAVA, G.: *Technológia automatizovanej strojárskkej výroby*. Bratislava, ALFA, 1991, 275 s., ISBN 80-05-00806-6
- [8] VASILKO, K.: Analysis of the Impact of Cutting on Machining Process, *Manufacturing Engineering*, issue 1, year IX, 2010, pp 5-9

- [9] MATISKOVÁ, D., KOTUS, M. : Methodology for determining the cutting conditions in drilling of automated manufacturing. In *Acta Universitatis Agriculturae et Silviculturae Mendelianae Brunensis*. ISSN 1211-8516, 2014, vol. 62, no. 5, s. 1033-1040.
- [10] KOTUS, M., J - BREZINOVÁ, J. - GUZANOVÁ, A. : Application of hard surfacing for repairing of agricultural parts. In *Research in agricultural engineering*. ISSN 1212-9151, 2013, vol. 59, no. 2, s. 61-67.
- [11] KOTUS, M., MATISKOVÁ, D. MURA, L. : Impact of technological factors on dosing of metal at die-casting. In *Advanced Materials Research*. ISSN 1022-6680, 2013, vol. 801, special iss., p. 143-149.
- [12] H. Poor, *An Introduction to Signal Detection and Estimation*. New York: Springer-Verlag, 1985, ch. 4.

#### About author:

**Darina Matisková**, Department of Manufacturing Management, Technical University in Kosice, Faculty of Manufacturing Technologies with seat in Presov, Slovak Republic, European Union  
Bayerova 1, 080 01 Prešov  
Phone: 00421904240638

Personal Profile author:

Darina Matisková, Ing. PhD., MBA, assist. profesor, and  
Lector at the Wyższa Szkoła Menedżerska w Warszawie.

He has 67 publications in International journal, Book Chapters and Conference Proceedings. She is the author of domestic and foreign monographs, university textbooks, industrial utility models, patents, etc.

The most significant publications:

**Selected methods from quality and automation of management production** / Darina Matisková - 1. vyd - Brno : Tribun - 2013. - 93 p.. - ISBN 978-80-971476-5-5.

**The Methodology of Economics Costs Influential on Automation of Component Production** / Darina Matisková - 2012. In: American Journal of Economics. No. 7 (2012), p. 164-170. - ISSN 2166-496X Spůsob přístupu: [www.americanjournalofeconomics-scientificandacademicpublishing.com](http://www.americanjournalofeconomics-scientificandacademicpublishing.com).

**Evaluation of the Effectiveness of Engineering Production Processes using Pareto Analysis** / Darina Matisková - 2015. In: Tem Journal. Vol. 4, no. 1 (2015), p. 96-101. - ISSN 2217-8309 Spůsob přístupu: [www.temjournal.com](http://www.temjournal.com).