

Vehicle Collision Avoidance with Integrated Parking Guidance System

S. Elakshumi

Abstract— In today's scenario, our personal life is highly dependent on the technology. Technology has advanced with years and so many changes have been brought about by these continuous technological advancements. This approach of technology has also increased the traffic hazards and the road accidents are becoming very frequent and unavoidable which causes huge loss of life. This happens due to the negligence of people who do not follow the traffic rules. Thereby in order to avoid accidents and to have an integrated parking system this paper mainly concentrates on vehicle collision avoidance through vehicular communication and parking guidance system to enable effective parking. The driver assistant features are implemented using vehicle to vehicle and vehicle to infrastructure communication. In this proposed paper a prototype has been developed which facilitates all the three features namely vehicle collision avoidance, emergency vehicle alert and parking guidance. A forward collision avoidance system in which the vehicles transmit details to other vehicles in case of hard braking of the front vehicle or presence of any obstacle through ultrasonic sensing. Emergency vehicles have a hard time making people aware of their presence. We include the emergency alert broadcast facility to emergency vehicles like ambulances, fire engines, etc., where the driver can respond and pave way for it. The parking in big cities has become one of the key causes of the city traffic congestion. Sending parking details directly to the vehicle is one of the effective way to improve the parking situation. To design this parking guidance system we are using Infrared sensors which can detect the presence and absence of vehicles.

Index Terms— Global Positioning System (GPS), Motor Vehicle Collision(MC), Vehicle To Vehicle(VTV).

I. INTRODUCTION

Road safety is a complex issue and there are a high number of factors and indicators involved in the accidents. The problem itself is underestimated in many countries, especially in developing countries where the issue is challenging. Road traffic safety refers to methods and measures for reducing the risk of a person using the road network. The vehicle collision and its impact emerged as the major problem in the last two decades when the use of the automobile increased to a subsequent number. A traffic collision, also known as a motor vehicle collision (MC), traffic accident, motor vehicle accident, car accident, automobile accident, road traffic collision, road traffic accident, wreck, car crash, or car smash occurs when a vehicle collides with another vehicle, pedestrian, animal, road debris, or other stationary obstruction, such as a tree or utility pole. Traffic collisions may result in injury, death, vehicle damage, or/and property damage.

S.Elakshumi, Department of Embedded System Technologies, Easwari Engineering College.

A number of factors contribute to the risk of collision, including vehicle design, speed of operation, road design, road environment, driver skill and/or impairment, and driver behaviour. Out of these driver's unawareness leads to maximum number of accidents. Worldwide, motor vehicle collisions lead to death and disability as well as financial costs to both society and the individuals involved.

Road injuries resulted in 1.4 million deaths in 2013 up from 1.1 million deaths in 1990. Almost all high-income countries have decreasing death rates, while the majority of low-income countries having increased deaths rates due to traffic collisions. Middle-income countries have the highest rate with 20 deaths per 80,000 inhabitants, 80% of all road fatalities by only 52% of all vehicles.

In order to avoid such situations and provide the driver with assistance researches are undertaken by different companies and research centres. Different technologies like VANET , WSN, Electromagnetic Interface etc.

Emerging wireless technologies for vehicle-to-vehicle (VTV) and vehicle to roadside (VTR) communications such as DSRC are promising to dramatically reduce the number of fatal roadway accidents by providing early warnings.

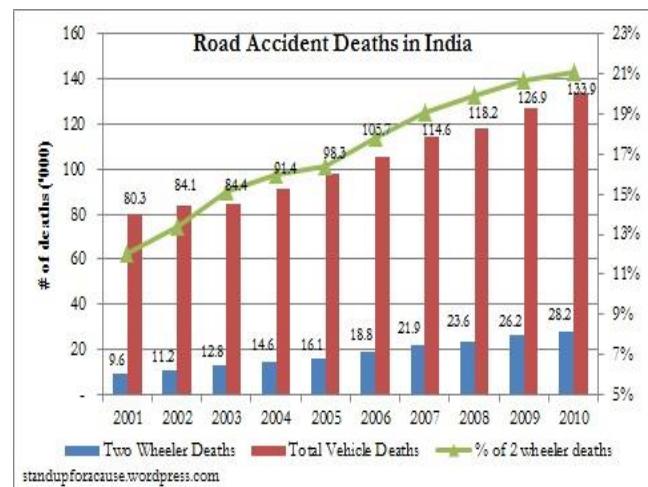


Fig. Statistics on number of road accident deaths

II. LITERATURE SURVEY

Internet can also be used monitor the traffic status. This concept was prop by *Hu Lingling et al(2011)*.According to this concept, a vehicle is allotted with a unique identification number and it's written electronically in the RFID tag. When the vehicle reaches the base station area, the RFID tag is read and Internet facility is provided. Using GPS, the traffic status is obtained through internet thereby the drivers can take

ultimate free path to reach their destination easily. The drawbacks of this system are given by

1. Unwanted delay in reading the RFID tag
2. Internet users are increased nowadays lads to network traffic. Therefore deadline can't be met some time in real-time application using Internet.

Pravin P Ashtankar et al(2009) proposed a solution to prevent accidents. The central idea of the system is to enable vehicles within each other proximity to be aware of their own location and then estimate their position with respect to other vehicles. This is accomplished with the help of two main technologies called GPS and RADAR. The drawbacks of this system are given by

1. The non unique spectral properties of their retuned RADAR signal that may lead to the improper detection .
2. The targets which are nearer to the RADAR cannot be detected easily rather it saturated the receiver

Navin kumar et al (2012) stated that traffic information can be broadcasted using visible light communication. According to their proposal the currently available traffic light controller made with light emitting diode can be used to broadcast the traffic data. This is line of sight communication. The vehicle which receives the information can relay it to the vehicle behind it using brake lights at the rear panel. This leads to adhoc v2v communication. LOS communication between the v2i and i2v are also possible to get information about present traffic condition. This system is proved to be effective if the communication range is less than 40m as LED's and currently available TLC have been used, this system is cost effective. The drawbacks

- 1.the communication range must be within 40m and should be LOS.
- 2.Since normal LED's cannot be focused for long distance, therefore high power led's are needed which in turn increases the cost.

Another major proposal was given by *Mounib khanafer et al (2009)*. The wireless sensor network for intelligent transportation system(WITS) collects and communicates information to organize the traffic at intersections. This depends on fixed infrastructure composed of roadside units and intersections. This depends on fixed infrastructure composed of roadside units and intersection units. The communication is supported between vtv and vti. Vehicle units send vehicle parameters to roadside units. Roadside units work on aggregating the received data before transferring them to the intersection unit which relays them to the final strategy subsystem. Drawbacks

1. This system is over dependent on infrastructure nodes located on the roadside.
2. No solution is proposed to avoid the collision in the communication between the vehicles.

Nazmus S Nafi and Jamil y khan(2012) suggested a solution to avoid the long waiting time at the junctions for the green signals. This scheme contains vehicles with onboard unit and will communicate with RSU. The RSU will get status info of the VLC and sends to OBU in range. Based on this

information the driver can increase or decrease the speed to avoid wasting time. Drawbacks

1. Not suitable to reduce traffic congestion
2. status information must be updated frequently

Shival Dubey & Abdul Wahid Ansari proposed a Electromagnetic anti-collision device to avoid Vehicular Head to Head/Back collision that estimates the distance between the two vehicles running extreme traffic condition. It incorporates distance finding between two vehicles using ultrasonic range finder. In will work in two stages: - A Range finder will continuously track the distance between two vehicles moving and sends it to the ECM using these inputs if it finds the vehicle in the vicinity of the other it will automatically actuate the sensor strip for Electromagnetic Induction.

Drawbacks

1. It is not cost efficient
2. Includes more hardware

Jie Liu et al. proposed a vehicle-to-vehicle communication protocol for cooperative collision warning. One major technical challenge addressed in this paper is to achieve low-latency in delivering emergency warnings in various road situations. Based on a careful analysis of application requirements, we design an effective protocol, comprising congestion control policies, service differentiation mechanisms and methods for emergency warning dissemination. Simulation results demonstrate that the proposed protocol achieves low latency in delivering emergency warnings and efficient bandwidth usage in stressful road scenarios.

Dr. Andreas Festag et al. Vehicular communication based on short-range wireless technology opens up novel applications improving road safety and travel comfort. Ad hoc networking enables a direct communication among cars as well as between cars and road-side communication devices. Geocast is an ad hoc routing scheme which is specifically considered in Europe as a core networking concept for future CAR-2-X systems. It provides wireless multi-hop communication and allows for geographical addressing and routing. This paper describes advanced concepts and mechanisms to deploy Geocast in realistic environments and presents NEC's CAR-2-X platform.

III. COMPONENTS FOR SYSTEM DESIGN

A. PIC MICROCONTROLLER 16F887

A microcontroller is a small computer on a single integrated circuit containing a processor core, memory, and programmable input/output peripherals used mainly for embedded applications.

In our project, we use this powerful yet easy-to-program, CMOS FLASH-based 8-bit PIC microcontroller which packs Microchip's powerful PIC architecture into an 40 pin package. For its low price, wide applications and easy availability it is used in industries, machine control, etc.

The important features it includes are,

- RISC Architecture with 35 instructions, all of which are single cycle instructions except for branches which has two cycles.

- Operating frequency of 0-20MHz.
- Precision internal oscillator with frequency range of 8-31 KHz.
- Power supply voltage of 2-5.5V.
- 8K ROM memory with FLASH. The chip could be reprogrammed upto 80,000 times.
- 368 bytes RAM Memory.
- 256 bytes EEPROM Memory.

B. ULTRASONIC SENSOR MODULE -HC - SR04

Ultrasonic ranging module HC - SR04 provides 2cm - 400cm non-contact measurement function, the ranging accuracy can reach to 3mm. The modules includes ultrasonic transmitters, receiver and control circuit.

working principle :

1. Using IO trigger for at least 8us high level signal
2. The Module automatically sends eight 40 kHz and detect whether there is a pulse signal back.
3. The Module automatically sends eight 40 kHz and detect whether there is a pulse signal back.

Test distance = (high level time × velocity of sound (340m/s) / 2

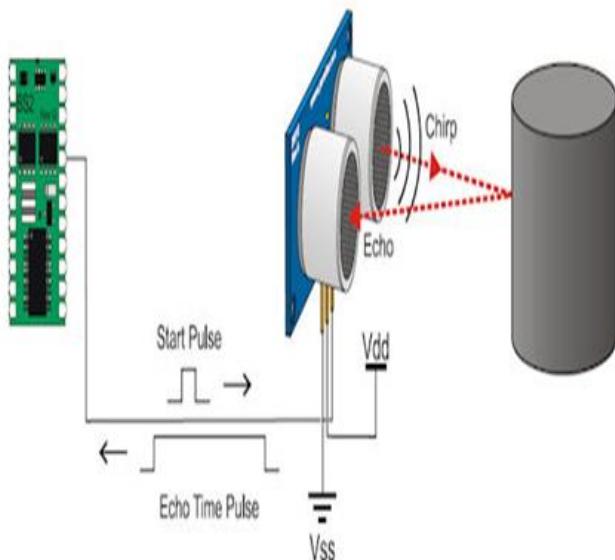


Fig. Ultrasonic sensor principle

C. INFRARED SENSOR MODULE-LM358

An infrared sensor measures the IR light that is transmitted in the environment to find object by the IR LED. This type of sensor is very popular in navigation for object avoidance or distance measured. On capturing a target in the left range, the left LED connected to the relevant IR LED will illuminate and vice versa. The ray reflected from target to IR receiver has a photo transistor. The LM358 series can be directly operated off of the standard +5V power supply voltage which is used in digital systems and will easily provide the required interface electronics without requiring the additional $\pm 15V$ power supplies.

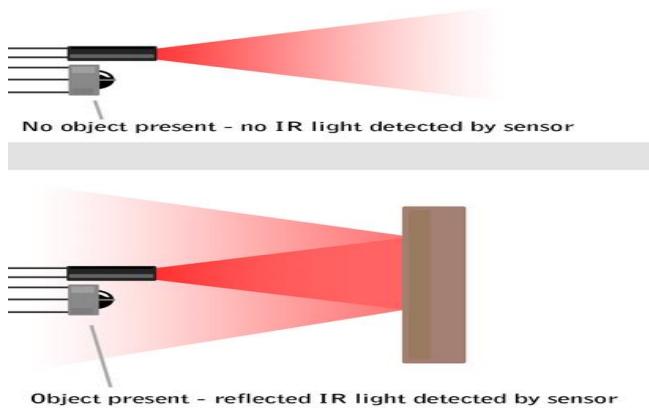


Fig. IR sensor detection

D. GPS MODULE

The Global Positioning System (GPS) is a multi-- functional system, which has high-precision, all-weather, and global radio navigation and positioning, timing functions. It used satellite network formed by 24 satellite transmit positioning signal to Earth, constantly firing. A GPS receiver anywhere on the Earth, as long as three or more satellite signals received, after calculating, you can report the location, time and state of motion of a GPS receiver.



Fig . GPS module

E. CC 2500 RF MODEM –RADIO CHIP

CC2500 RF Modem is a transceiver module which provides easy to use RF communication at 2.4 GHz. It can be used to transmit and receive data at multiple baud rates from any standard CMOS/TTL source. This module is a direct line in replacement for the serial communication and it requires no extra hardware and no extra coding to turn the wired communication into wireless one.

It works in Half Duplex mode i.e. it provides communication in both directions, but only one direction at same time (not simultaneously). This switching from receiver to transmitter mode is done automatically.

F. LIQUID CRYSTAL DISPLAY(LCD)

A liquid crystal display (LCD) is a thin, flat electronic visual display that uses the light modulating properties of liquid

Vehicle Collision Avoidance with Integrated Parking Guidance System

crystals (LCs). LCs does not emit light directly. They are used in a wide range of applications, including computer monitors, television, instrument panels, aircraft cockpit displays, etc. LCDs have displaced cathode ray tube displays in most applications. They are usually more compact, lightweight, portable, less expensive, more reliable.

IV. PROPOSED SYSTEM

1. CIVILIAN VEHICLE--FORWARD COLLISION AVOIDANCE

Forward collision avoidance feature is performed using Ultrasonic sensors. The sensor allow us to look further away in space and further ahead in time. The collision avoidance system is an automobile safety system designed to reduce the severity of an accident. Forward collision avoidance system aims at avoiding or atleast mitigating host vehicle frontal collision. The system gives an alert to encourage the driver to decelerate in advance with signal on display.

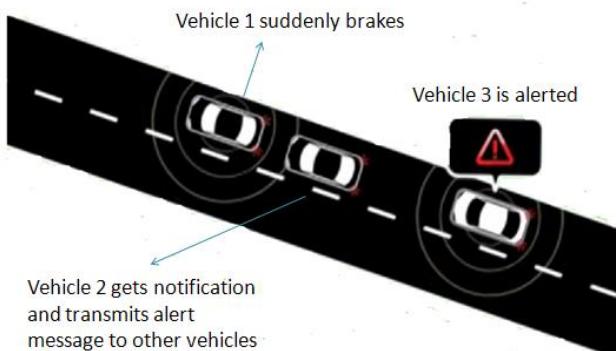


Fig. Vehicle collision avoidance scenario

When the vehicle suddenly brakes and when the distance between the vehicle and the one behind is lower, the vehicle behind is alerted and further it transmits the alert message to all the vehicles thereby avoiding collision occurrence.

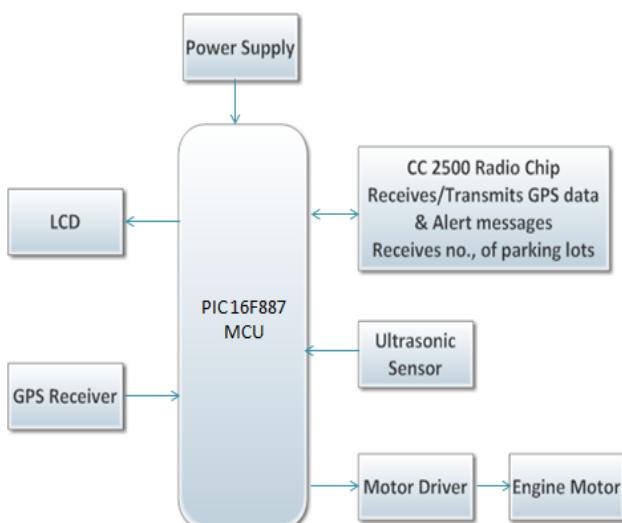


Fig. Block Diagram of Civilian vehicle

Working principle --- Ultrasonic sensors work on a principle similar to radar or sonar which evaluates attributes of target by interpreting the echoes from radio or sound waves

respectively. Ultrasonic sensors generate high frequency sound waves and evaluates the echo which is received back by the sensor. Sensors calculate the time interval between sending the signal and receiving the echo to determine the distance to an object. This technology is used for measuring distance.

This sensor works on Doppler Effect. It consists of a ultrasonic transmitter and a receiver. The transmitter transmits the signal in one direction. This transmitted signal is reflected back by the obstacle and received by the receiver. So the total time taken by the signal to get transmitted and to received back will be used to calculate the distance between the ultrasonic sensor and the obstacle.

Flow diagram --- The ultrasonic sensor installed in front of the vehicle monitors the relative distance of the vehicle directly ahead/obstacle. If the distance is greater than the threshold value, the sensor indicates high threat of collision and threatens the driver. The vehicle transmits alert messages to other vehicles.

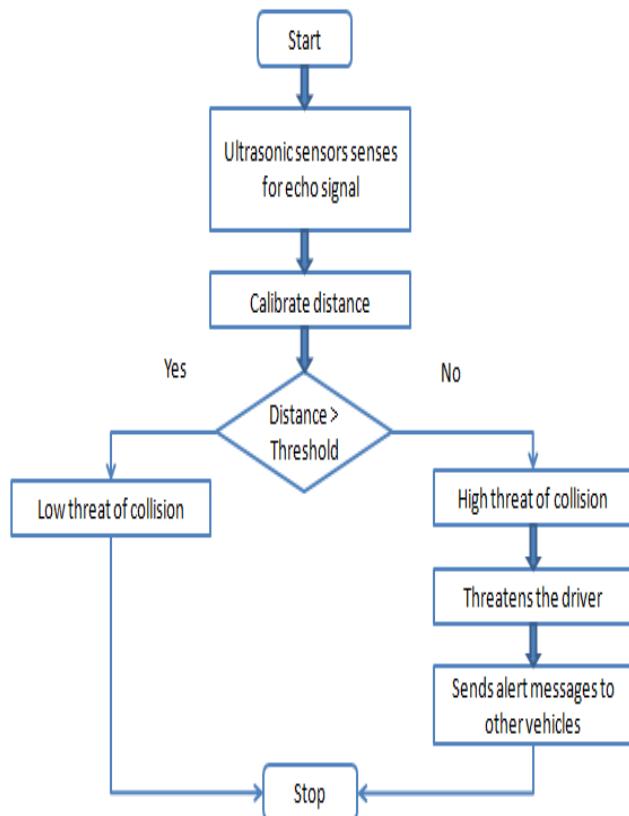


Fig. The flow diagram of civilian vehicle

2. EMERGENCY VEHICLE ALERT

Today, most cars are much more soundproof than ever before; most have air-conditioning so windows are usually closed; and many have high power stereos playing the radio or CD's at levels that cancel all sounds coming from outside the car. Some drivers are hearing impaired. These factors combine to make it difficult to build lights, sirens and horns that will alert the drivers inside their cars. Emergency vehicles have a hard time making people aware of their presence. In our project emergency alert message is sent to all other vehicles and thus providing the free passage for the fast moving emergency vehicle.

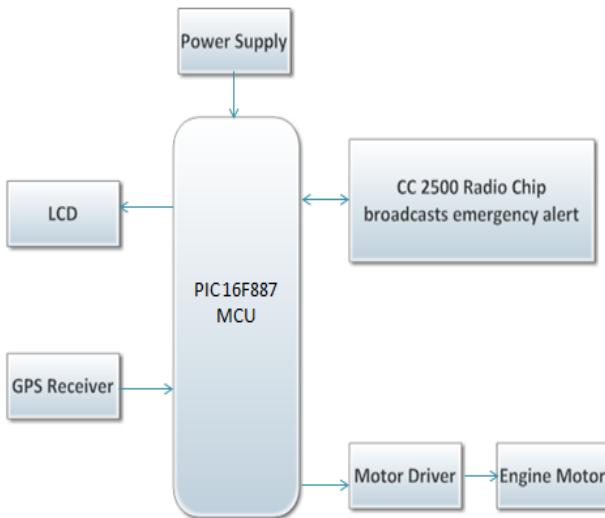


Fig. Block diagram of Emergency vehicle

Flow diagram --- The Emergency vehicle can act also as ordinary vehicle. The latitude and longitude values are got by the emergency vehicle thereby calculating the direction of the vehicle approximately and sends emergency alert message to all the vehicles in its proximity.

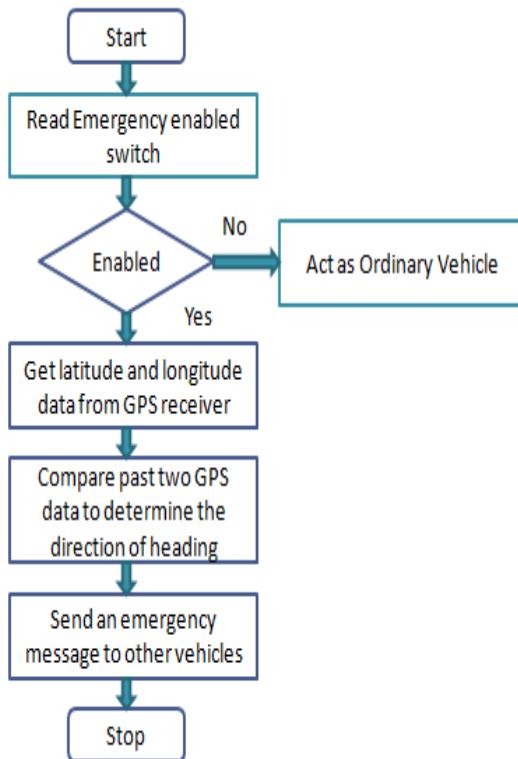


Fig. The flow diagram of emergency vehicle

3. PARKING GUIDANCE

The parking in big cities has become one of the key causes of the city traffic congestion. Even when a collision has occurred, the roads would be congested with vehicles and to clear traffic until the road is cleared parking guidance is absolute necessity for vehicles. Sending parking details directly to the vehicle is one of the effective way to improve the parking situation. To design this parking guidance system

we are using Infrared sensors. These sensors find the free lots for parking. It can detect the presence of vehicle in lots on request and display it on LCD in its Central monitoring unit and send the details to the requested vehicle.

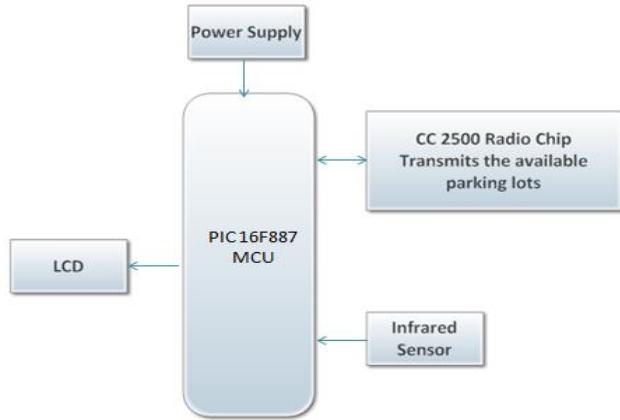


Fig. Block diagram of Infrastructure module

Flow diagram --- On request by the vehicle, the infrastructure module senses for the vacant lots using Infrared sensors. The gathered details are transmitted from the Infrastructure module to the vehicle requested for the parking details.

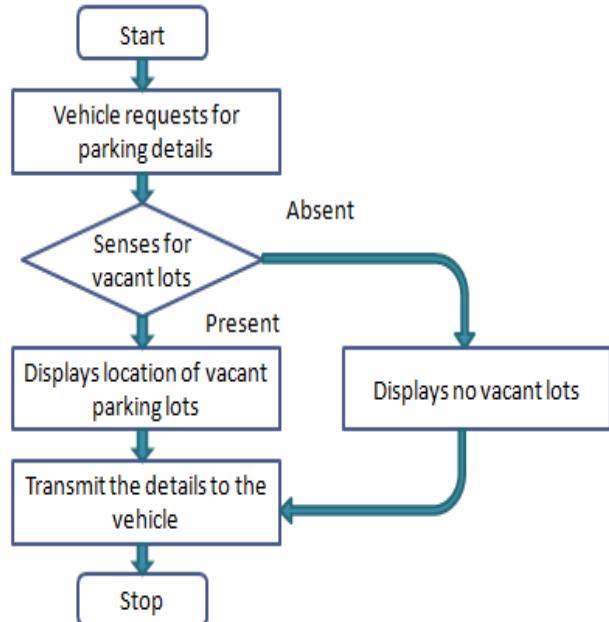


Fig. The flow diagram of Infrastructure module

Working principle --- The Infrastructure module would be constantly broadcasting its own unique message signal(probably characters). If the vehicle needs a parking space, it would send an acknowledgment signal back to the infrastructure. The IR transmitter constantly transmits the IR rays which would be bounced back and received by the IR receiver if a vehicle is present, else it would not. There will be a difference in the voltage levels in the comparators of the IC LM358. When the car is present the output of the comparator goes low whereas in its absence the output would be high. Thus the location of free parking lots would be sent to the

MCU in the infrastructure which in turn sends the same to the vehicle which makes the requisition.

V. CONCLUSION

The paper considers three important features – forward collision avoidance, emergency vehicle alert and parking guidance. The paper is considered from the significant conditions. The vehicle to vehicle communication is implemented and is verified with the help of prototype. The design is implemented for a short range and changing the range can be implemented in real time applications. Message is transmitted from the victim to the other vehicles present within the range. This continuous transfer was established by using the UART.

Under the emergency scenario the emergency vehicles like ambulance, fire engine shall broadcast an alert message to other vehicles within its proximity in real time. The parking situation which is a major problem in big cities is highly improved by sending the parking details directly to the vehicles.

The features implemented in our project is an initiation which could be implemented in real time cars with further advancements. *The advancements* that could be made are as follows,

- In Forward vehicle collision avoidance, speed sensors and camera module can be added to enhance the safety.
- In Infrastructure communication, traffic-light control can also be included.

REFERENCES

- [1] .“Vehicle Accident Detection and Messaging system Using GPS and GSM”, Mr. Mangesh Neet, Mr. Sanjay Ambekar, Mrs. V.S. Jahagirdar, Department of Electronics Design Technology from , National Institute of Electronics and IT, Aurangabad.
- [2].http://www.senouci.net/download/Publications/Book-Chapters/Senouci_IC2- 2008_2.pdf.
- [3].<http://www.mikroe.com/chapters/view/2/chapter-1-pic16f887-microcontroller-device-overview/>
- [4].Milan Verle , first edition (2009), "PIC Micro controllers -Programming in C with examples", Mikro Electronica.
- [5].“Road safety audit: An Identification Of Black spots on Busy Corridor Between Narol- Naroda of Ahmedabad city”,Parikh Vaidehi Ashokbhai i, Student, M.E. Civil (Transportation) – 4th Sem L.D.College of Engineering, Gujarat Technological University, Navrangpura, Ahmedabad, Dr. A.M. Jain (Associate Professor, M.E. Civil (Transportation) – 4th Sem L.D.College of Engineering, Gujarat Technological University, Navrangpura, Ahmedabad.
- [6].“Automatic Speed Control and Accident Avoidance Of vehicle using Multi Sensors”, S Nagakishore Bhavanam Dept. of ECE, ANUCET Acharya Nagarjuna University Guntur, India.kishore.ece.anu@gmail.com
- [7].Elvik Rune, Second edition (2009), "The Handbook of road safety measures, Emerald Group publishing Limited, UK.

S.Elakshumi, Department of Embedded System Technologies, Easwari Engineering College